

RWF | PULSAIR™

WALL FAN HEATER



THE CLASSIC FAN HEATER

You won't find anything better than this efficient, durable and low noise fan heater. The Pulsair is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). It can also be mounted vertically or horizontally so that air can flow either up and down or right and left. Finally, the slim-line Pulsair can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for hallways or bathrooms, it can also be installed anywhere in the house, such as the office, or in commercial spaces. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 347 V, the Pulsair is recognized and recommended by those in the know.

VERY QUIET FAN HEATER

THE MOST RESISTANT GRILLE ON THE MARKET

INSTANT HEAT NICHROME ELEMENT

MULTIPLE INSTALLATION OPTIONS RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

ADAPTS TO MULTIPLE MARKETS AVAILABLE IN: 120 V, 208 V, 240 V AND 347 V

COLOURS

- **standard:** white, soft white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan – 40 CFM (500 W to 1000 W models) – 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset

ELEMENT

- nichrome element produces instant heat

CONTROL

- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended


INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions

WARRANTY

- five years

FOUR INSTALLATION OPTIONS

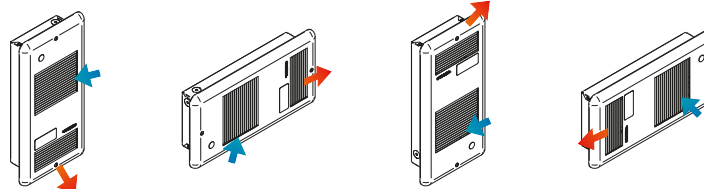

IDEAL FOR:


hallway, bathroom, locker room, office

TECHNICAL SPECIFICATIONS

| WITHOUT CONTROL | BUILT-IN THERMOSTAT | 24 V CONTROL | POWER | VOLTAGE | FLOW | THROW DISTANCE | HEAT RISE | WEIGHT |
|-----------------|---------------------|--------------|-----------|---------|------|----------------|-----------|--------|
| CODE | CODE | CODE | WATTS | VOLTS | CFM | M FT. | °C °F | KG LB |
| RWF0501 | --- | --- | 500 | 120 | 40 | 2 6'6" | 30 54 | 2.7 6 |
| RWF0508 | --- | --- | 500 | 208 | 40 | 2 6'6" | 30 54 | 2.7 6 |
| RWF0502 | --- | --- | 500/375 | 240/208 | 40 | 2 6'6" | 30 54 | 2.7 6 |
| RWF0503 | RWF0503T | RWF0503C24 | 500 | 347 | 40 | 2 6'6" | 30 54 | 2.7 6 |
| RWF0751 | --- | --- | 750 | 120 | 40 | 2 6'6" | 67 121 | 2.7 6 |
| RWF0758 | --- | --- | 750 | 208 | 40 | 2 6'6" | 67 121 | 2.7 6 |
| RWF0752 | --- | --- | 750/563 | 240/208 | 40 | 2 6'6" | 67 121 | 2.7 6 |
| RWF0753 | RWF0753T | RWF0753C24 | 750 | 347 | 40 | 2 6'6" | 67 121 | 2.7 6 |
| RWF1001 | --- | --- | 1000 | 120 | 40 | 2 6'6" | 76 136 | 2.7 6 |
| RWF1008 | --- | --- | 1000 | 208 | 40 | 2 6'6" | 76 136 | 2.7 6 |
| RWF1002 | --- | --- | 1000/750 | 240/208 | 40 | 2 6'6" | 76 136 | 2.7 6 |
| RWF1003 | RWF1003T | RWF1003C24 | 1000 | 347 | 40 | 2 6'6" | 76 136 | 2.7 6 |
| RWF1251 | --- | --- | 1250 | 120 | 75 | 2.1 6'10" | 65 117 | 2.7 6 |
| RWF1258 | --- | --- | 1250 | 208 | 75 | 2.1 6'10" | 65 117 | 2.7 6 |
| RWF1252 | --- | --- | 1250/938 | 240/208 | 75 | 2.1 6'10" | 65 117 | 2.7 6 |
| RWF1253 | RWF1253T | RWF1253C24 | 1250 | 347 | 75 | 2.1 6'10" | 65 117 | 2.7 6 |
| RWF1501 | --- | --- | 1500 | 120 | 75 | 2.1 6'10" | 79 141 | 2.7 6 |
| RWF1508 | --- | --- | 1500 | 208 | 75 | 2.1 6'10" | 79 141 | 2.7 6 |
| RWF1502 | --- | --- | 1500/1125 | 240/208 | 75 | 2.1 6'10" | 79 141 | 2.7 6 |
| RWF1503 | RWF1503T | RWF1503C24 | 1500 | 347 | 75 | 2.1 6'10" | 79 141 | 2.7 6 |
| --- | --- | --- | 2000 | 120 | 75 | 2.1 6'10" | 111 199 | 2.7 6 |
| RWF2002 | --- | --- | 2000/1500 | 240/208 | 75 | 2.1 6'10" | 111 199 | 2.7 6 |
| RWF2008 | --- | --- | 2000 | 208 | 75 | 2.1 6'10" | 111 199 | 2.7 6 |
| RWF2003 | RWF2003T | RWF2003C24 | 2000 | 347 | 75 | 2.1 6'10" | 111 199 | 2.7 6 |

Add W for white or SW for soft white

TECHNICAL DRAWINGS

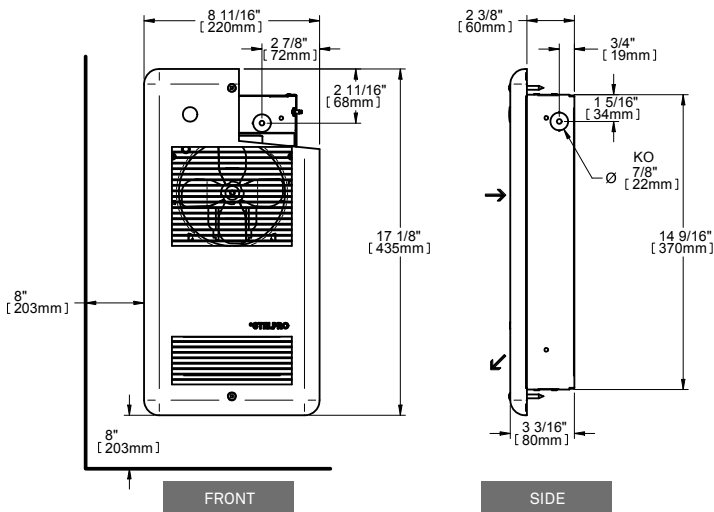

ACCESSORIES

| PRODUCT | DESCRIPTION |
|---------|---|
| RWFT1** | built-in single pole thermostat [120 V-347 V] |
| RWFT2* | built-in double pole thermostat [120 V-347 V] |
| RWFSA* | surface adapter |

* Add W for white or SW for soft white.

* Supplied with a white knob (with a white grille) and a soft white knob (with a soft white grille)