

Opera B

Radiant Towel Warmer



Features

Color

- Standard: white.

Finish

- Standard: epoxy/polyester anti-rust powder coating resistant to UV rays.

Voltage

- 240/208V, 60 Hz, 1-phase.

Construction

- Convex casing with rounded corners for maximum space saving.
- Perforated front panel for better radiant heat diffusion.
- High-limit temperature control with automatic reset.
- Two towel bars included. **1**

Heating element

- Ribbed monoblock element made of high-emissivity aluminum alloy. **2**

Control

- Programmable built-in electronic proportional-action digital thermostat, ultra-precise to 1/10 °C (1/5 °F), located at the top of the unit. **3**
- LCD backlit display with digital controls lockable by key combination and the ability to add a code for unlocking.
- Temperature display format (°C or °F).
- "On-Off" button.
- "Manual" button to choose from Comfort, Economy and Frost Protection modes.
- "Open-window" button to activate the open-window detection function.
- "Automatic" button.
- Energy use indicator.
- Heating indicator light.

Installation

- Quick surface-mounted installation with the included wall mounting bracket.
- Flexible cable with electrical wall box cover plate included.
- Requires installation of a wall electrical box not supplied.

Warranty

- 2-year warranty against defects.
- 5-year warranty on the heating element.

Application


- Bathroom.

This towel warmer offers radiant heat diffusion across its entire honeycombed surface, for quick towel drying and filling the bathroom with perceptible and enveloping heat.

Featuring a precise programmable electronic thermostat, Opera B towel warmer offers a stunning blend of aesthetics, technology and energy efficiency.



1




2



3

Recommended installation height		Minimum clearances							
in.	mm	Front		Sides		Above		Below	
10	254	30	762	6	152	8	203	1	25

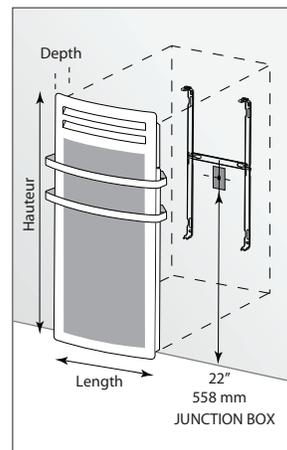

Without towel bars

Length		Depth ¹	
in.	mm	in.	mm
17 5/16	440	5 1/16	128

With towel bars

Length		Depth ¹	
in.	mm	in.	mm
18 7/8	479	7 1/16	179

¹ Depth shown includes wall bracket.

Models

Product #	Price	Volts	Watts	Height		Weight	
				in.	mm	lb	kg
7635-C10-BB	693.00	240/208	1000/750	33 5/16	846	17.4	7.9
7635-C15-BB	780.00	240/208	1500/1125	41 1/4	1047	19.8	9.2

